





單支荷重700~800Kgf
Load Capacity 700~800Kgf / each



專利斜度設計，防止因間隙產生共振。
Patent: Rake design. To prevent vibration.

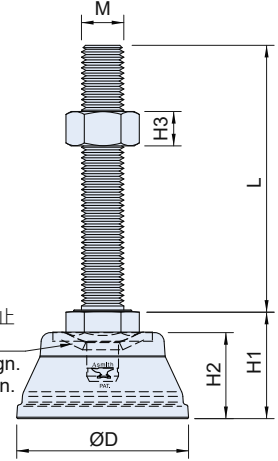

材質與表面處理

- 盤座：尼龍(PA66+GF) · 黑色。
- 螺桿：DK-01合金鋼(SCM) · 鍍鋅。
DS-01不銹鋼(SUS 304)。
- 盤墊：橡膠(NBR) · 耐油、耐鹼、耐熱130°C。

特徵


- 螺桿與盤座結合處斜度設計，防止因間隙產生共振。
- 防震、防銹(DS系列)、耐鹼、防滑、耐磨耗、耐油。
- 不含盤墊：材料符合UL 94 HB防火等級。

MATERIAL AND FINISH

- Base: Nylon(PA66+GF), Black.
- Cushion: Rubber (NBR), Resistance to Greasiness, Alkali, Heat 130°C.
- Bolt: DK-01: Steel (SCM), Zinc plated.
DS-01: Stainless steel (SUS304).

FEATURES

- The rake of bolt's bottom and base's hole design is to prevent vibration while they are assembled.
- Resistance to shock, conductance rust (DS Series), alkali, slip, abrasion and greasiness.
- Without Cushion: Use the original raw material compliant with UL94 HB standards.

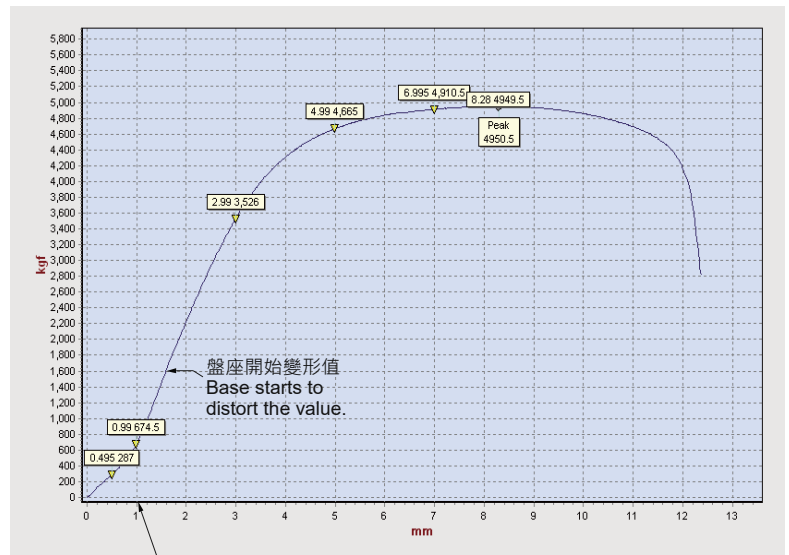

設定荷重 700kgf 下壓值 1 mm。Ø65 圓腳座荷重測試曲線圖 (不含盤墊)
Suppose the leveling feet was pressuring under load capacity 700 kgf per 1 mm.
The chart show the leveling feet load capacity of bolt and base dimension Ø65 mm.

SPECIFICATIONS:

Unit:mm

型式 Type	產品編號 Item No.		尺寸 Dimensions							荷重 Load Capacity (kgf)	重量 Weight(g)	
	螺桿 Bolt (SCM)	螺桿 Bolt (SUS304)	M	L	ØD	H1	H2	H3	W		SCM	SUS304
不含盤墊 Without Cushion	DK-0116100F	DS-0116100F	M16*P2.0	100	65	41	32.7	13	24	700	290	292
	DK-0116150F	DS-0116150F		150							355	362
	DK-0120100F	DS-0120100F	100	416							417	
	DK-0120150F	DS-0120150F	150	516							526	
	DK-0120200F		200	616								
含盤墊 With Cushion	DK-0116100FR	DS-0116100FR	M16*P2.0	100	67	44.6	36.2	13	24	700	308	309
	DK-0116150FR	DS-0116150FR		150							373	379
	DK-0120100FR	DS-0120100FR	100	434							434	
	DK-0120150FR	DS-0120150FR	150	534							544	
	DK-0120200FR		200	634								