

行程 ( Spring compression : 1.5~4 )

特徵

- 彈簧具有迫緊式功能。
- 耐腐蝕性·耐藥品性。
- 有直角鉤及平面鉤可選擇搭配。




FEATURES

- 2 springs provide strong and average compression force.
- Corrosion resistance.
- The option are vertical keeper and horizontal keeper to been selected.

SPECIFICATION:

Unit:mm

產品編號 Item No.	材質 Material	表面處理 Finish	拉伸距離 \ 引張荷重 Extension Length \ Compression Force				重量 Weight (g)
			1.5 mm	2 mm	3 mm	4 mm	
CS-111	SUS304	震動亮面 Vibration ground	9 kgf	13 kgf	18 kgf	22 kgf	30
CT-11101W	SPCC	鍍鋅 Zinc Plated					30
CT-111	SPCC	材料本質 Natural					29.2

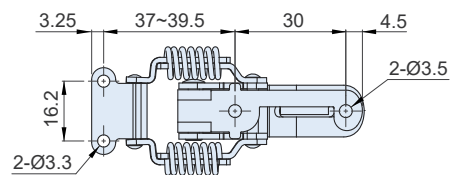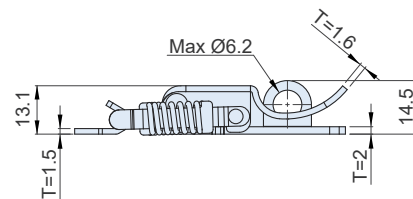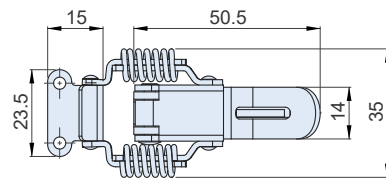

行程 ( Spring compression : 1.5~4 )

特徵

- 彈簧具有迫緊式功能。
- 可用銅掛鎖阻絕彈開可能性及增加安全性·適用於振動設備。

FEATURES

- Spring design with compression function.
- Standard Lock-hole can using with lock. Suitable for vibration equipment.

SPECIFICATION:

Unit:mm

產品編號 Item No.	材質 Material	表面處理 Finish	拉伸距離 \ 引張荷重 Extension Length \ Compression Force				重量 Weight (g)
			1.5 mm	2 mm	3 mm	4 mm	
CS-0412	SUS304	震動亮面 Vibration ground	9 kgf	13 kgf	18 kgf	22 kgf	42.5
CT-0412	SPCC	鍍鋅 Zinc Plated					