




不含盤墊
Without Cushion




含盤墊
With Cushion

單支荷重700~800Kgf
Load Capacity 700~800Kgf / each

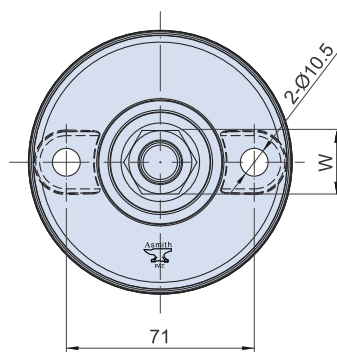

專利斜度設計，防止
因間隙產生共振。
Patent: Rake design.
To prevent vibration.

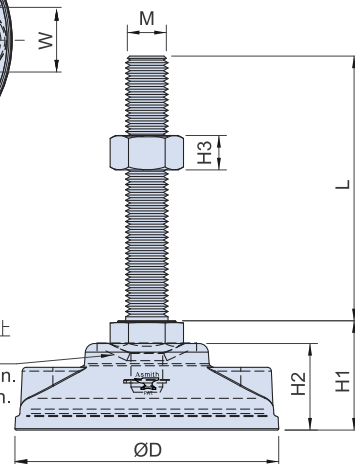

材質與表面處理

- 盤座：尼龍(PA66+GF)，黑色。
- 螺桿：DK-02 合金鋼(SCM)，鍍鋅。
DS-02 不銹鋼(SUS304)，電解。
- 盤墊：橡膠(NBR)，耐油、耐鹼、耐熱130°C。

特徵


- 螺桿與盤座結合處斜度設計，防止因間隙產生共振。
- 防震、防銹(DS系列)、耐鹼、防滑、耐磨耗、耐油。
- 請勿用於乾燥室環境，以確保其性能和壽命。
- 材料符合UL94 HB防火等級。

MATERIAL AND FINISH

- Base: Nylon(PA66+GF), Black.
- Cushion: Rubber (NBR), Resistance to Greasiness, Alkali / Heat 130°C.
- Bolt: DK-02: Steel (SCM), Zinc plated.
DS-02: Stainless steel (SUS304), Electro Polishing.

FEATURES

- The rake of bolt's bottom and base's hole design is to prevent vibration while they are assembled.
- Resistance to shock, conductance rust (DS Series), alkali, slip, abrasion and greasiness.
- Do not use in dry indoor environments.
- Use the original raw material compliant with UL94 HB standards.

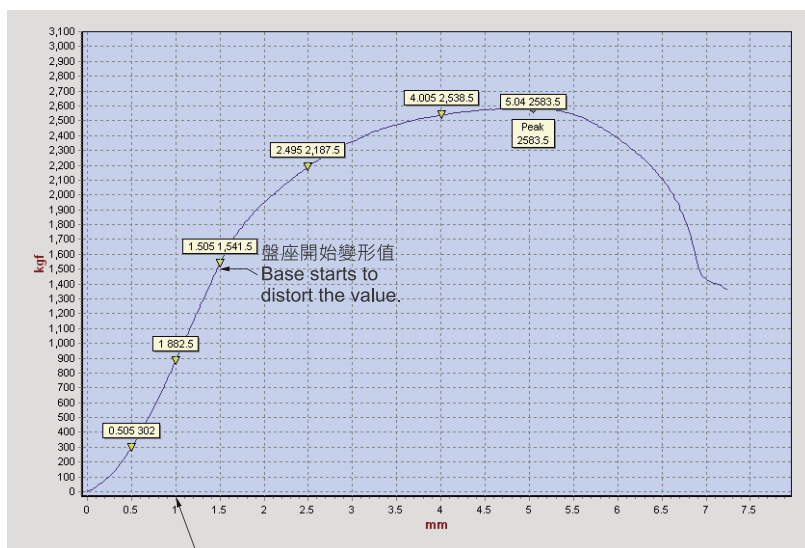

Suppose the leveling feet was pressuring under load capacity 700 kgf per 1 mm.
The chart show the leveling feet load capacity of bolt and base dimension Ø100 mm.
設定荷重 700kgf 下壓值 1 mm。Ø100 圓腳座荷重測試曲線圖 (不含盤墊)

SPECIFICATIONS:

Unit:mm

型式 Type	產品編號 Item No.		尺寸 Dimensions							荷重 Load Capacity (kgf)	重量 Weight(g)	
	螺桿Bolt (SCM)	螺桿Bolt (SUS304)	M	L	ØD	H1	H2	H3	W		SCM	SUS304
不含盤墊 Without Cushion	DK-0216100N	DS-0216100N	M16*P2.0	100	100	41.3	33	13	24	700	327	338
	DK-0216150N	DS-0216150N		150							445	402
	DK-0220100N	DS-0220100N	M20*P2.5	100		43.3		16	30	800	459	462
	DK-0220150N	DS-0220150N		150							559	567
	DK-0220200N			200							659	
含盤墊 With Cushion	DK-0216100NR	DS-0216100NR	M16*P2.0	100	102	44.8	36.4	13	24	700	363	374
	DK-0216150NR	DS-0216150NR		150							481	438
	DK-0220100NR	DS-0220100NR	M20*P2.5	100		46.8		16	30	800	495	498
	DK-0220150NR	DS-0220150NR		150							595	603
	DK-0220200NR			200							695	