
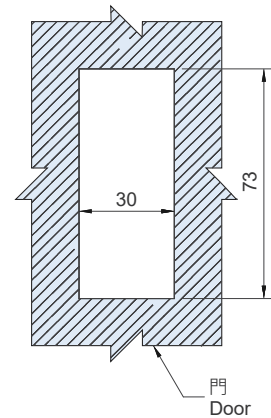


BS-173714(W)


安裝孔開孔尺寸  
Opening Size

BS-1732-A14(W)

鑰匙鎖號：1001  
Key no. : 1001裝配示意圖  
Installation

擋片軸心孔設計四點定位，可快速方便組裝完全不鬆轉。

Pawl is fixed by 4 positioning points and the grooved shaft-bolt, easy for assembly and adjustment.

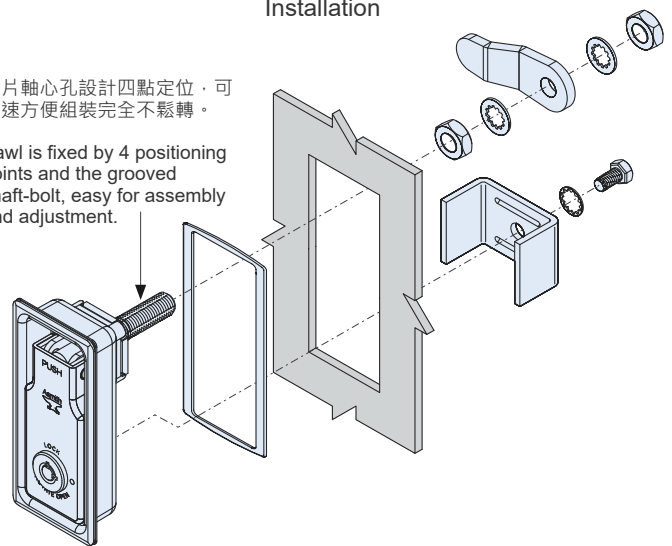

### 材質與表面處理

- 本體與掀把：不銹鋼(SUS304)·拋毛絲面。
- 擋片、固定架、軸心、鑰匙：不銹鋼(SUS304)。

### 特徵

- 專利設計：擋片軸心孔設計四點定位，可快速方便組裝。
- 現場裝配者只需旋轉一顆螺絲，即可快速安裝門鎖。
- 左、右、上·三方向兼用型。
- 開啟可後退3mm開閉迴轉順暢，關門後門板可迫緊箱框不搖動
- 擋片可自由調整至使用者關門迫緊時較適當之鬆緊程度
- 耐熱、耐腐蝕性。
- 防塵、防水 (IP66)

### 用途

- BS-171(短軸型)：適用於淺箱體、薄門板，或內部空間較淺者，擋片夾持距離固定。
- BS-172(標準軸型)：擋片調整範圍大且適中，可廣泛使用於一般門板箱體設計上。
- BS-173(長軸型)：適用於門板內裝設隔音、隔熱材料，或門框較厚之箱體或櫃體。

### MATERIAL AND FINISH

- Body and Lever: Stainless steel (SUS304). Vibration ground and Brushed finish in front.
- Shaft, Pawl, Mounting Bracket and Key: Stainless steel (SUS304).

### FEATURES

- Patent: Pawl is fixed by 4 positioning points and the grooved shaft-bolt, easy for assembly and adjustment. Need only to slide the pawl through the shaft-groove to the correct position, more stable and accurate.
- Left, right and top opening.
- The pawl moved forward and reversed vertically 3mm while the compression latch is opened and closed.
- Resistance to heat, corrosion and dust.
- Dust-resistant and waterproof (IP66).




### APPLICATION

- BS-171 (Short Shaft): For shallow boxes, thin door panels or any shallow inside space box.
- BS-172 (Standard Shaft): Used widely for door panel of general cabinet boxes.
- BS-173 (Long Shaft): Pawl can be easily positioned to accommodate the suitable compression.

BS-171  
(短軸型 Short Shaft)

BS-172  
(標準軸型 Standard Shaft)

BS-173  
(長軸型 Long Shaft)

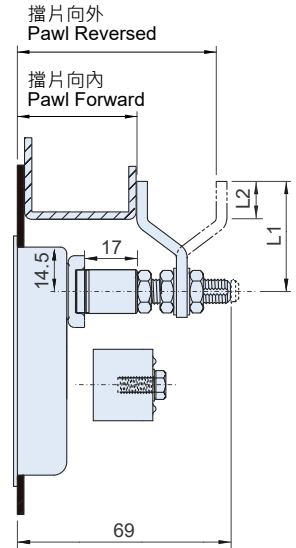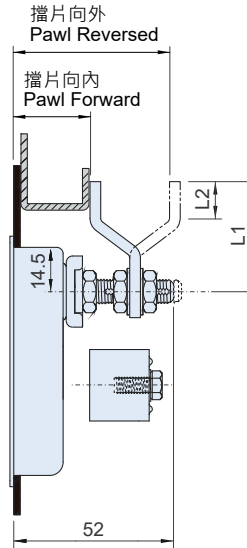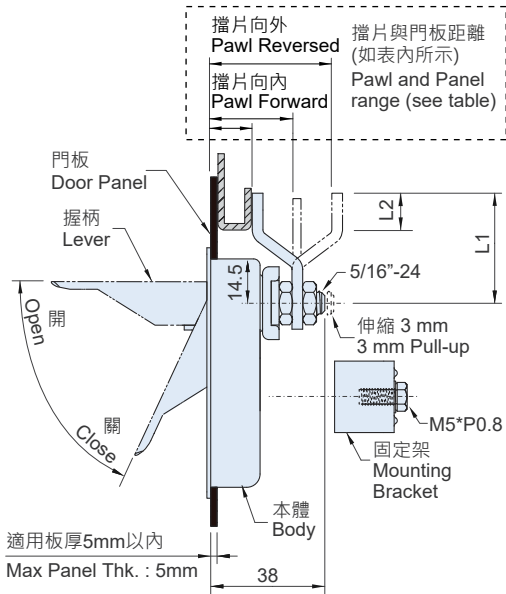


SPECIFICATION:

Unit:mm

產品編號 Item No.		軸心型式 Shaft Type	檔片型式 Pawl Type	尺寸 Dimensions		檔片與門板距離 Pawl and Panel range		重量 Weight(g)	
無鎖芯 Without Lock	有鎖芯 With Lock			不鏽鋼 SUS304	L1	L2	向內 Pawl Forward	向外 Pawl Reversed	無鎖芯 Without Lock
BS-171744(W)	BS-1712-A44(W)	短軸型 Short Shaft	#44S	33	12	26		157.9	168.1
BS-171714(W)	BS-1712-A14(W)		#14S	36		21	31	160.7	170.9
BS-171715(W)	BS-1712-A15(W)		#15S			13	39	161.7	171.9
BS-171716(W)	BS-1712-A16(W)		#16S			5	47	164.3	174.5
BS-172714(W)	BS-1722-A14(W)	標準軸型 Standard Shaft	#14S	36	12	27~37	37~47	171.9	182.1
BS-172715(W)	BS-1722-A15(W)		#15S			19~29	45~55	173.4	183.6
BS-172716(W)	BS-1722-A16(W)		#16S			11~21	53~63	175.7	185.8
BS-173714(W)	BS-1732-A14(W)	長軸型 Long Shaft	#14S	36	12	44~54	54~64	176.9	187.1
BS-173715(W)	BS-1732-A15(W)		#15S			36~46	62~72	178.4	188.6
BS-173716(W)	BS-1732-A16(W)		#16S			28~38	70~80	180.7	190.9

檔片型式 Pawl Type

SUS304

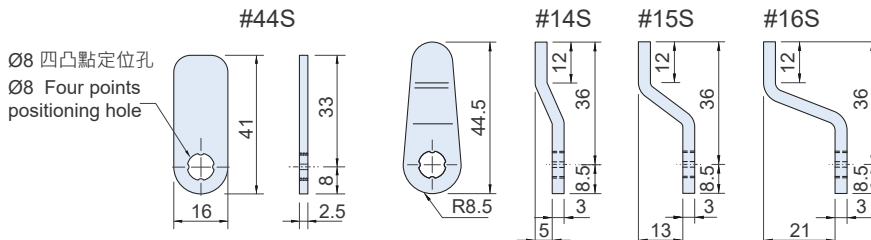

SPECIFICATION:

Unit:mm

檔片型號 Pawl Type	材質 Material	表面處理 Finish	重量 Weight(g)
#44S	不鏽鋼 SUS304	振動亮面 Vibration ground	10.8
#14S			13.6
#15S			14.6
#16S			17.2