

CT-5030-W



迫緊搭扣 Draw Latch (Spring Loaded Type)



CS-111 Series
CT-111

迫緊搭扣 Draw Latch (Spring Loaded Type)

SUS304

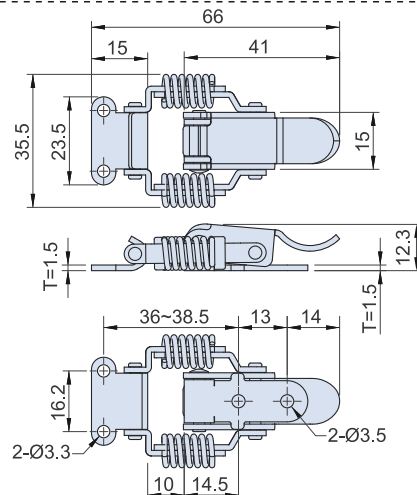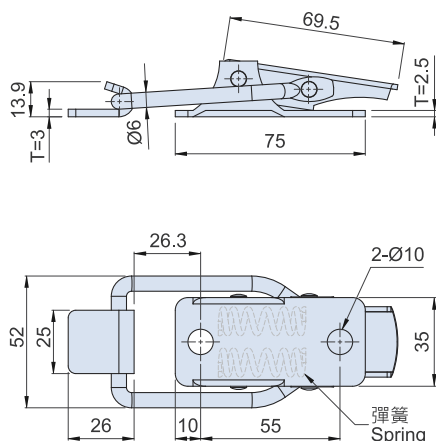

特徵

- 內裝雙隱藏強力彈簧，具有迫緊功能，用於振動設備極佳。
- 外觀平滑不傷手，極佳美觀表面。

FEATURES

- Equipped with dual concealed strong springs with a tightening function, which is excellent for vibration equipment.
- Excellent aesthetic appearance and smooth surface.

引張荷重 Compression Force

拉伸距離 \ 引張荷重 Extension Length \ Compression Force				
1 mm	2 mm	3 mm	4 mm	
20 kgf	28 kgf	34 kgf	42 kgf	

SPECIFICATION:

Unit:mm

產品編號 Item No.	材質 Material	表面處理 Finish	重量 Weight (g)
CT-5030-W	SPCC	鍍鋅 Zinc plated	215

特徵

- 彈簧具有迫緊式功能。
- 耐腐蝕性，耐藥品性。

FEATURES

- 2 springs provide strong and average compression force.
- Corrosion resistance.

引張荷重 Compression Force

拉伸距離 \ 引張荷重 Extension Length \ Compression Force				
1.5 mm	2 mm	3 mm	4 mm	
9 kgf	13 kgf	18 kgf	22 kgf	

SPECIFICATION:

Unit:mm

產品編號 Item No.	材質 Material	表面處理 Finish	重量 Weight (g)
CS-111	SUS304	震動亮面 Vibration ground	30
CT-11101W	SPCC	鍍鋅 Zinc Plated	
CT-111	SPCC	材料本質 Natural	29.2

CS-0412
CT-0412



迫緊搭扣 Draw Latch (Spring Loaded Type)

SUS304



CS-112 迫緊搭扣 Draw Latch
(Spring Loaded Type)

SUS304

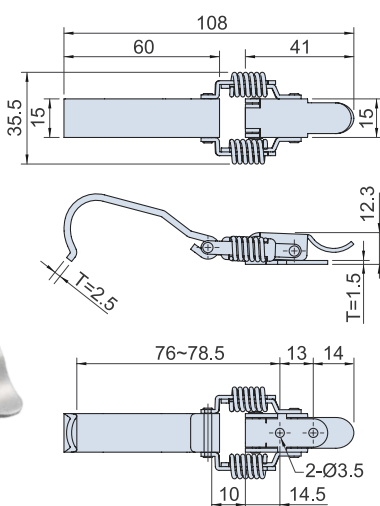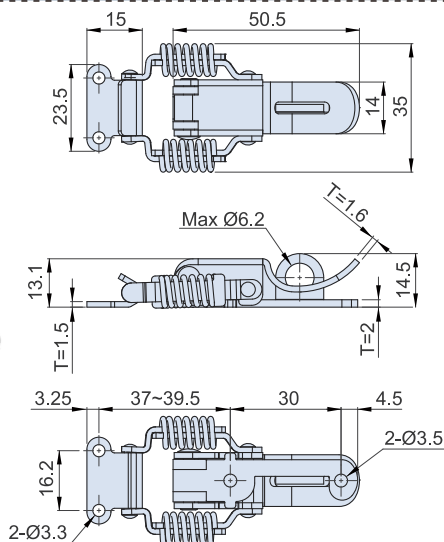

特徵

- 彈簧具有迫緊式功能。
- 可用銅掛鎖阻絕彈開可能性及增加安全性，適用於振動設備。

FEATURES

- Spring design with compression function.
- Standard Lock-hole can using with lock. Suitable for vibration equipment.

行程 (Spring compression : 1.5~4)

引張荷重 Compression Force

拉伸距離 \ 引張荷重 Extension Length \ Compression Force				
1.5 mm	2 mm	3 mm	4 mm	
9 kgf	13 kgf	18 kgf	22 kgf	

特徵

- 彈簧具有迫緊式功能。
- 耐腐蝕性，耐藥品性。
- 適合用於桶槽、振動設備。

FEATURES

- 2 springs provide strong and average compression force.
- Corrosion resistance.
- Suitable for barrels and vibration equipment.

引張荷重 Compression Force

拉伸距離 \ 引張荷重 Extension Length \ Compression Force				
1.5 mm	2 mm	3 mm	4 mm	
9 kgf	13 kgf	18 kgf	22 kgf	

SPECIFICATION:

Unit:mm

產品編號 Item No.	材質 Material	表面處理 Finish	重量 Weight (g)
CS-112	SUS304	震動亮面 Vibration ground	57

SPECIFICATION:

Unit:mm

產品編號 Item No.	材質 Material	表面處理 Finish	重量 Weight (g)
CS-0412	SUS304	震動亮面 Vibration ground	42.5
CT-0412	SPCC	鍍鋅 Zinc Plated	