
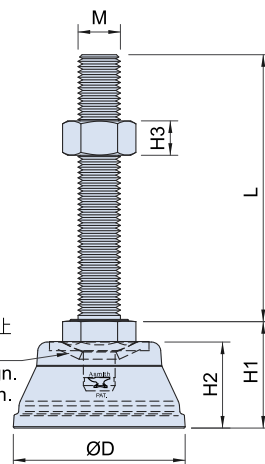


不含盤墊
Without Cushion含盤墊
With Cushion單支荷重700~800Kgf
Load Capacity 700~800Kgf / each專利斜度設計，防止
因間隙產生共振。
Patent: Rake design.
To prevent vibration.

材質與表面處理

- 盤座：尼龍(PA66+GF)，黑色。
- 螺桿：DK-01合金鋼(SCM)，鍍鋅。
DS-01不銹鋼(SUS 304)，電解。
- 盤墊：橡膠(NBR)，耐油、耐鹼、耐熱130°C。

特徵


- 螺桿與盤座結合處斜度設計，防止因間隙產生共振。
- 防震、防銹(DS系列)、耐鹼、防滑、耐磨耗、耐油。
- 請勿用於乾燥室環境，以確保其性能和壽命。
- 材料符合UL94 HB防火等級。

MATERIAL AND FINISH

- Base: Nylon(PA66+GF), Black.
- Cushion: Rubber (NBR), Resistance to Greasiness, Alkali, Heat 130°C.
- Bolt: DK-01: Steel (SCM), Zinc plated.
DS-01: Stainless steel (SUS304), Electro Polishing.

FEATURES

- The rake of bolt's bottom and base's hole design is to prevent vibration while they are assembled.
- Resistance to shock, conductance rust (DS Series), alkali, slip, abrasion and greasiness.
- Do not use in dry indoor environments.
- Use the original raw material compliant with UL94 HB standards.

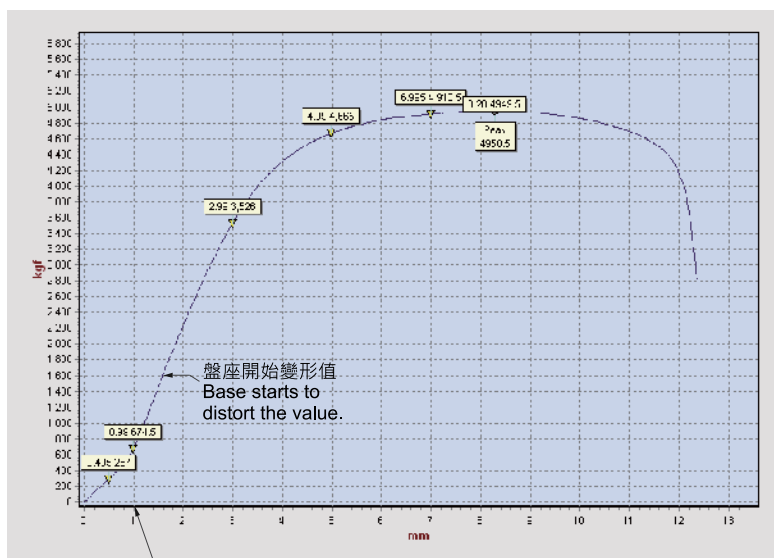設定荷重 700kgf 下壓值 1 mm。Ø65 圓腳座荷重測試曲線圖 (不含盤墊)
Suppose the leveling feet was pressuring under load capacity 700 kgf per 1 mm.
The chart show the leveling feet load capacity of bolt and base dimension Ø65 mm.

SPECIFICATIONS:

Unit:mm

型式 Type	產品編號 Item No.		尺寸 Dimensions							荷重 Load Capacity (kgf)	重量 Weight(g)	
	螺桿 Bolt (SCM)	螺桿 Bolt (SUS304)	M	L	ØD	H1	H2	H3	W		SCM	SUS304
不含盤墊 Without Cushion	DK-0116100F	DS-0116100F	M16*P2.0	100	65	41	32.7	13	24	700	290	292
	DK-0116150F	DS-0116150F		150							355	362
	DK-0120100F	DS-0120100F	M20*P2.5	100		43	36.2	16	30	800	416	417
	DK-0120150F	DS-0120150F		150							516	526
	DK-0120200F			200							616	
含盤墊 With Cushion	DK-0116100FR	DS-0116100FR	M16*P2.0	100		44.6	36.2	13	24	700	308	309
	DK-0116150FR	DS-0116150FR		150							373	379
	DK-0120100FR	DS-0120100FR	M20*P2.5	100		46.6	36.2	16	30	800	434	434
	DK-0120150FR	DS-0120150FR		150							534	544
	DK-0120200FR			200							634	