



GU-A3-1



GU-A3-2






GU-A3-3



GU-A3-4



GU-A3-5

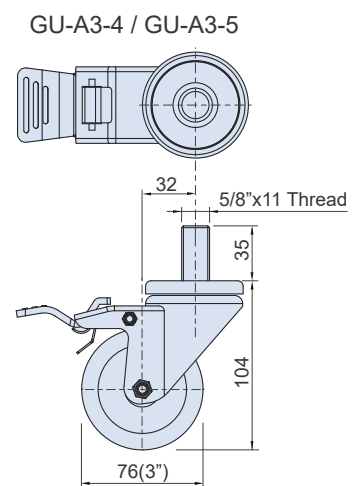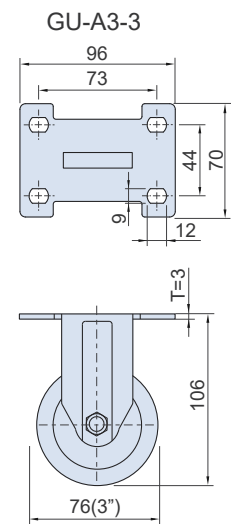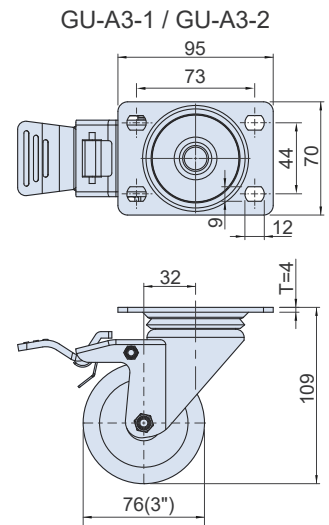

### 特徵

- 輪架表面處理鍍鋅。
- 兩側均有防塵輪蓋，可預防細屑侵入及美化外觀等優點。
- 聚氨酯輪 PU輪，一般稱為優力膠輪，天然優力膠有非常良好的磨耗特性、不留輪痕、汙痕並且擁有優良的耐油與耐化學藥劑特性。天然灌注PU不會有水解的情況產生，可以維持穩定的材質硬度且對地面的汙染少，因此適用的範圍相當廣泛。

### FEATURES

- The housing is zinc plated.
- Special dust-proof hubs design.
- Polyurethane wheel is suppressive property against fouling to floor surface and the resistance against oil and chemical. Besides, natural perfusion PU can't be hydrolyzed, so it can maintain a stable material hardness and less pollution to the ground. The range of application is quite extensive.

### SPECIFICATION:

| 產品編號<br>Item No. | 輪架材質<br>Housing Material | 輪子材質<br>Wheel Material | 型式<br>Type    | 尺寸 Dimensions        |                   |                            | 荷重<br>Load Capacity (kgf/pc) | 重量<br>Weight (kg) |
|------------------|--------------------------|------------------------|---------------|----------------------|-------------------|----------------------------|------------------------------|-------------------|
|                  |                          |                        |               | 輪徑<br>Wheel Diameter | 輪寬<br>Wheel Width | 迴轉半徑<br>Radius of gyration |                              |                   |
| GU-A3-1          | 鐵<br>Steel               | PU                     | 培林<br>Bearing | 76(3'')              | 35                | 75                         | 200                          | 0.83              |
| GU-A3-2          |                          |                        |               |                      |                   | 110                        |                              | 0.90              |
| GU-A3-3          |                          |                        |               |                      |                   | 75                         |                              | 0.54              |
| GU-A3-4          |                          |                        |               |                      |                   | 75                         |                              | 0.75              |
| GU-A3-5          |                          |                        |               |                      |                   | 110                        |                              | 0.82              |

Unit:mm