

## 特徵

- 搭扣內裝雙隱藏強力彈簧，具有迫緊功能，用於振動設備極佳。
- 將鉤座隱藏於搭扣內，以達到一體性極簡外觀。
- 安全設計：採用從外部看不到安裝螺絲的安全設計，所以關閉時螺絲不會被拆卸。當加裝鋼掛鎖時，將可大幅增加安全性。
- 不鏽鋼材質具有耐腐蝕性、耐藥品性。

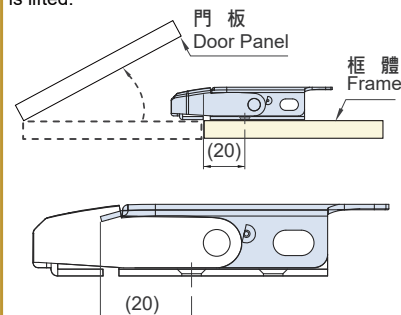
## FEATURES

- The draw latch is equipped with dual concealed strong springs with a tightening function, which is excellent for vibration equipment.
- The keeper is concealed within the draw latch to achieve minimalist appearance.
- Safety design: After being buckled, the installation screws are not visible from the outside, because the housing conceals all functional parts and so secures against dismantling when closed. Therefore, when a padlock is installed, it can greatly increasing security.
- SUS304 has corrosion resistance and resistance to chemicals.

## 特殊安裝方式需知

若門板採取上掀時，搭扣第一個螺絲孔洞需與框體距離至少20mm，避免門板掀起時造成干涉

If the door panel is lifted upwards, the first screw hole of the latch needs to be positioned at least 20mm away from the frame to avoid interference when the door is lifted.



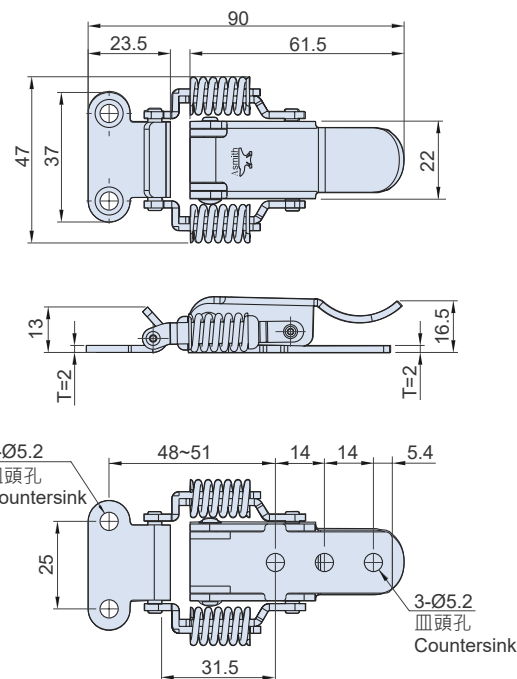

## 引張荷重 Compression Force

拉伸距離 \ 引張荷重 Extension Length \ Compression Force			
1 mm	2 mm	3 mm	4 mm
11 kgf	16 kgf	28 kgf	36 kgf

## SPECIFICATION:

Unit:mm

產品編號 Item No.	材質 Material	表面處理 Finish	重量 Weight (g)
CS-3130	SUS304	震動亮面 Vibration ground	75

使用例  
Example of application

行程 (Spring compression : 1~4)

## SPECIFICATION:

Unit:mm

產品編號 Item No.	材質 Material	表面處理 Finish	拉伸距離 \ 引張荷重 Extension Length \ Compression Force				重量 Weight (g)
			1 mm	2 mm	3 mm	4 mm	
CS-1120	SUS304	震動亮面 Vibration ground	22 kgf	27 kgf	32.5 kgf	38 kgf	88
CT-1120	SPCC	鍍鋅 Zinc Plated	28 kgf	36 kgf	41 kgf	47 kgf	88

## 特徵

- 彈簧具有迫緊式功能。

## FEATURES

- Spring design with compression function.