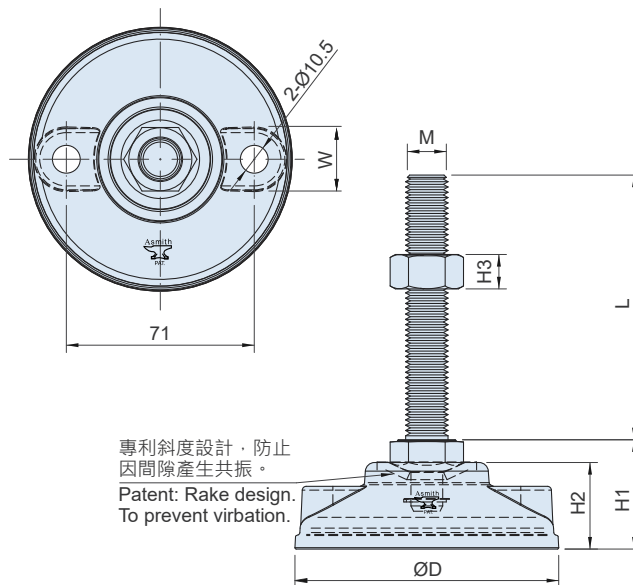


不含盤墊  
Without Cushion含盤墊  
With Cushion單支荷重700~800Kgf  
Load Capacity 700~800Kgf / each專利斜度設計，防止  
因間隙產生共振。  
Patent: Rake design.  
To prevent vibration.

## 材質與表面處理

- 盤座：尼龍(PA66+GF)，黑色。
- 螺桿：DK-02 合金鋼(SCM)，鍍鋅。  
DS-02 不銹鋼(SUS304)。
- 盤墊：橡膠(NBR)，耐油、耐鹼、耐熱130°C。

## 特徵


- 螺桿與盤座結合處斜度設計，防止因間隙產生共振。
- 防震、防銹(DS系列)、耐鹼、防滑、耐磨耗、耐油。
- 不含盤墊：材料符合UL94 HB防火等級。

## MATERIAL AND FINISH

- Base: Nylon(PA66+GF), Black.
- Cushion: Rubber (NBR), Resistance to Greasiness, Alkali / Heat 130°C.
- Bolt: DK-02: Steel (SCM), Zinc plated.  
DS-02: Stainless steel (SUS304).

## FEATURES

- The rake of bolt's bottom and base's hole design is to prevent vibration while they are assembled.
- Resistance to shock, conductance rust (DS Series), alkali, slip, abrasion and greasiness.
- Without Cushion: Use the original raw material compliant with UL94 HB standards.

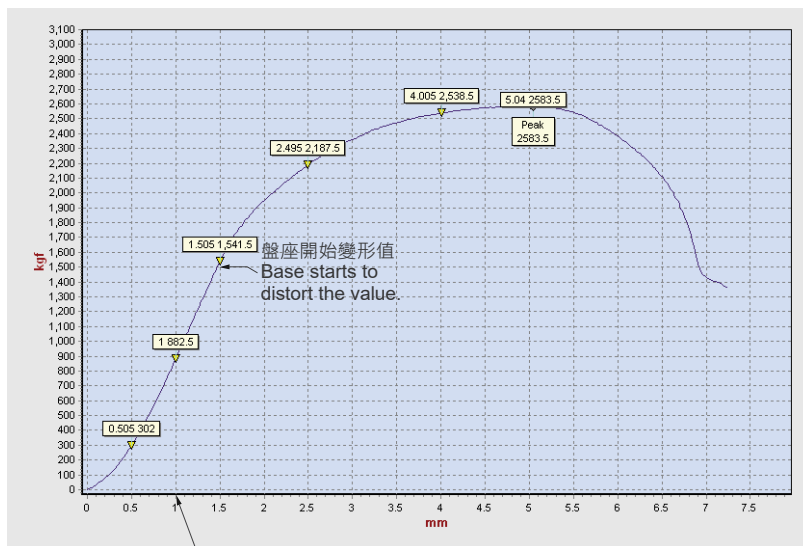

Suppose the leveling feet was pressuring under load capacity 700 kgf per 1 mm.  
The chart show the leveling feet load capacity of bolt and base dimension Ø100 mm.  
設定荷重 700kgf 下壓值 1 mm。Ø100 圓腳座荷重測試曲線圖 (不含盤墊)

## SPECIFICATIONS:

Unit:mm

| 型式<br>Type                 | 產品編號 Item No.   |                    | 尺寸 Dimensions |     |     |      |      |    |    | 荷重<br>Load<br>Capacity<br>(kgf) | 重量 Weight(g) |        |
|----------------------------|-----------------|--------------------|---------------|-----|-----|------|------|----|----|---------------------------------|--------------|--------|
|                            | 螺桿Bolt<br>(SCM) | 螺桿Bolt<br>(SUS304) | M             | L   | ØD  | H1   | H2   | H3 | W  |                                 | SCM          | SUS304 |
| 不含盤墊<br>Without<br>Cushion | DK-0216100N     | DS-0216100N        | M16*P2.0      | 100 | 100 | 41.3 | 33   | 13 | 24 | 700                             | 327          | 338    |
|                            | DK-0216150N     | DS-0216150N        |               | 150 |     |      |      |    |    |                                 | 445          | 402    |
|                            | DK-0220100N     | DS-0220100N        | M20*P2.5      | 100 |     | 43.3 |      | 16 |    | 800                             | 459          | 462    |
|                            | DK-0220150N     | DS-0220150N        |               | 150 |     |      |      |    |    |                                 | 559          | 567    |
|                            | DK-0220200N     |                    |               | 200 |     |      |      |    |    |                                 | 659          |        |
| 含盤墊<br>With<br>Cushion     | DK-0216100NR    | DS-0216100NR       | M16*P2.0      | 100 | 102 | 44.8 | 36.4 | 13 | 24 | 700                             | 363          | 374    |
|                            | DK-0216150NR    | DS-0216150NR       |               | 150 |     |      |      |    |    |                                 | 481          | 438    |
|                            | DK-0220100NR    | DS-0220100NR       | M20*P2.5      | 100 |     | 46.8 |      | 16 |    | 800                             | 495          | 498    |
|                            | DK-0220150NR    | DS-0220150NR       |               | 150 |     |      |      |    |    |                                 | 595          | 603    |
|                            | DK-0220200NR    |                    |               | 200 |     |      |      |    |    |                                 | 695          |        |