



AS-4030



AS-4030

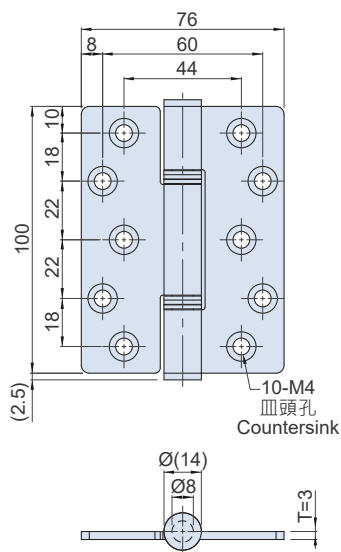


AS-4050

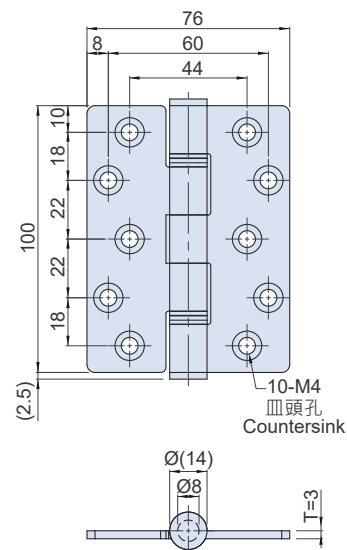


AS-4050



板金安裝範例
Sheet Metal Installation

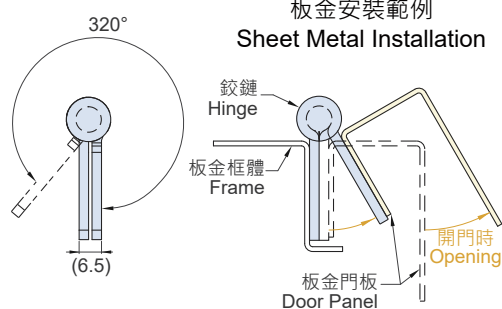

木板安裝範例
Wooden Board Installation

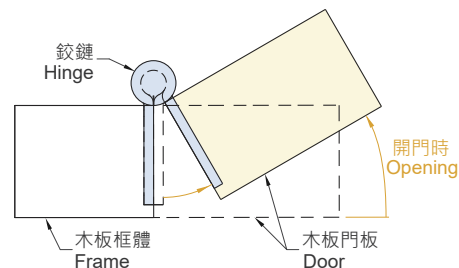

特徵

- 軸心有培林可抑制金屬粉塵的產生，適用於無塵室之產業。
- 鉸鏈片之間具有極密間隙，當安裝於機械鉸金、門板後，密合的間距，也可解決門板上下搖晃、無法正確對準門框的問題。

FEATURES

- Rotating Part using the Bearing to repress the dust of metal, applicable to clean room.
- The middle gap between butt and butt is very close.

SPECIFICATION:

Unit:mm

產品編號 Item No.	材質 Material	表面處理 Finish	產品荷重 Load Capacity (kg/2pcs)	重量 Weight (g)
AS-4030	SUS304	毛絲面	120	256
AS-4050		Brushed finish		