




ES-122300S




ES-123600B

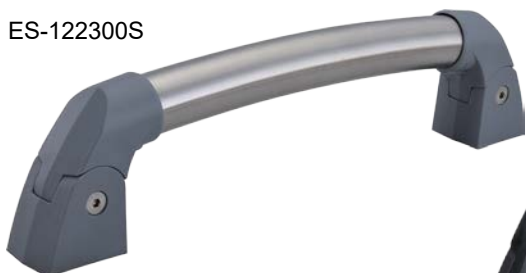

安裝於平面門板
Installed on the flat panels

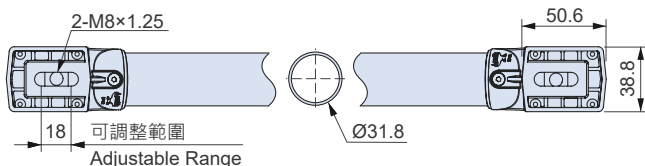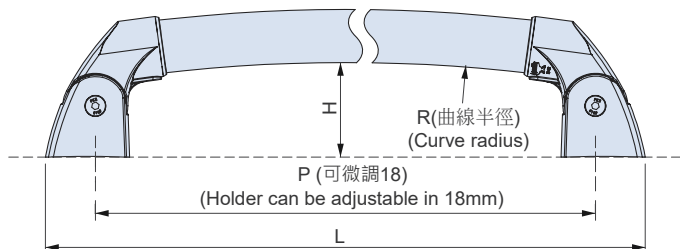


安裝於弧面門板
Installed on the curved panels

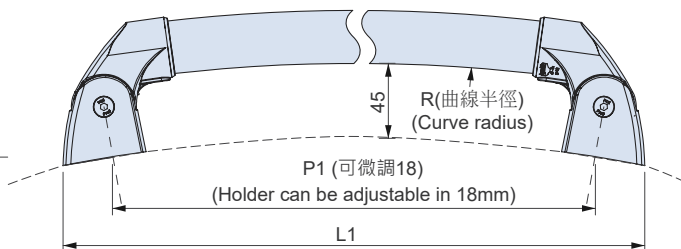


門外鎖固方式

1. 先將固定座以圖示方式輕鎖於門板上。
2. 再以把手合兩孔適當孔距後再鎖緊。
3. 最後將兩側皿頭內六角螺絲鎖緊。

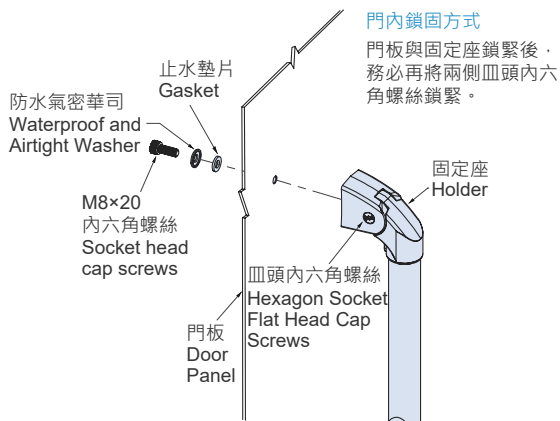

Panels Inner Stationary Type

When installed holder on the panel a tight, then to fastener hexagonal head cap screw tight, too.

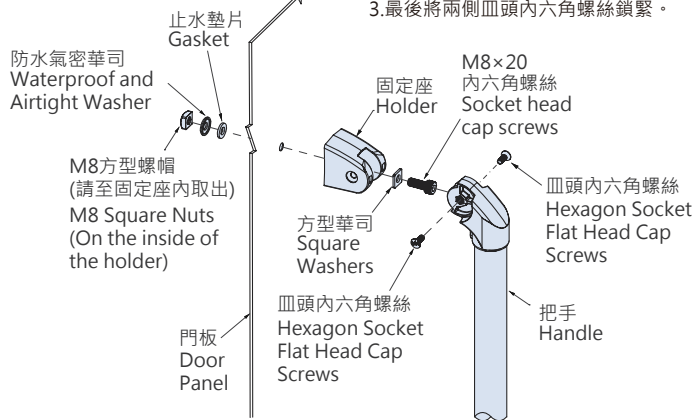

Panels Outside Stationary Type

1. Please refer to the photo to install holder on the panel lightly first.
2. To look a suitable pitch for this handle, then to install handle tight.
3. Finally, to fastener hexagonal head cap screw tight.

材質與表面處理

- 固定座：尼龍(PA66+GF) · 黑色、灰色。
- 手握柄：不銹鋼(SUS304) · 毛絲面。

特徵

- 固定座：孔距可微調18mm便於安裝調整，固定座可擺動，適用於各種弧度面門板，具防水功能(IP66)，耐酸鹼、耐油、耐熱 -20°C ~ 150°C。
- 材料符合UL94 HB防火等級。

MATERIAL AND FINISH

- Holder : Nylon(PA66+GF), Black or Gray.
- Handle : Stainless Steel(SUS304), Brushed finish.

FEATURES

- Holder: The holder is waterproof(IP66) and can suit for all kind of panel with different curve angle. The hole pitch can be adjustable within 18mm, easy to install. Working temperature is -20°C~150°C, resistance to acid, alkali, and greasiness.
- The material compliant with UL94 HB standards.

Item No. Specification :
產品編號規範 :

Handle Type P Holder Color
管規 P(孔距) 座色

SPECIFICATION:

Unit: mm

產品編號 Item no.	座色 Holder Color	尺寸 Dimensions						荷重 Load Capacity (kgf)	重量 Weight (g)
		R	P	P1	H	L	L1		
ES-122300	B(黑色) Black	950	300	290	56.8	360	349	100	453
ES-122600			600	580	94	660	637		666
ES-123600		1680	600	589	72	660	647.4		673
ES-123700			700	686	82	760	744.8		752
ES-123800	S(灰色) Gray	2038	800	784	93.5	859.8	842.4		805
ES-124700			700	690	75.4	760	748.7		750
ES-124800			800	787	84.8	859.8	846		823