


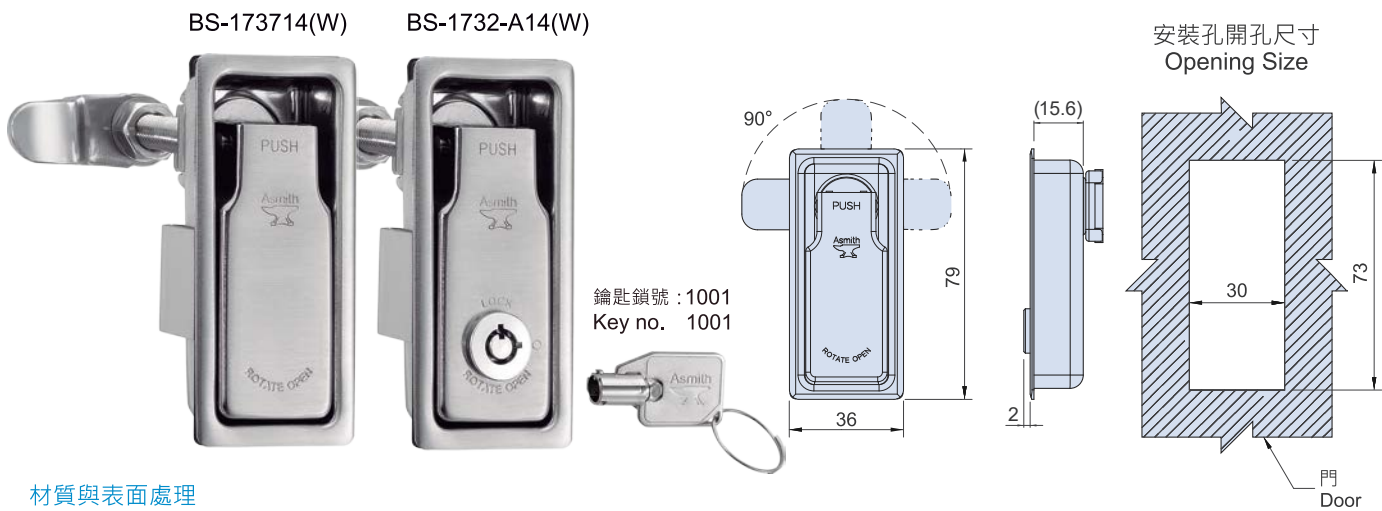

材質與表面處理

- 本體與掀把：不銹鋼(SUS304)，拋毛絲面。
- 檔片、固定架、軸心、鑰匙：不銹鋼(SUS304)。

特徵

- 專利設計：檔片軸心孔設計四點定位，可快速方便組裝。
- 現場裝配者只需旋轉一顆螺絲，即可快速安裝門鎖。
- 左、右、上、三方兼用型。
- 開啟可後退3mm開閉迴轉順暢，關門後門板可迫緊箱框不搖動
- 檔片可自由調整至使用者關門迫緊時較適當之鬆緊程度
- 耐熱、耐腐蝕性。
- 防塵、防水 (IP66)


MATERIAL AND FINISH

- Body and Lever: Stainless steel (SUS304). Vibration ground
- and Brushed finish in front. Shaft, Pawl, Mounting Bracket and Key: Stainless steel (SUS304).


FEATURES

- Patent: Pawl is fixed by 4 positioning points and the grooved shaft-bolt, easy for assembly and adjustment. Need only to slide the pawl through the shaft-groove to the correct position, more stable and accurate.
- Left, right and top opening.
- The pawl moved forward and reversed vertically 3mm while the compression latch is opened and closed.
- Resistance to heat, corrosion and dust.
- Dust-resistant and waterproof (IP66).

裝配示意圖
Installation

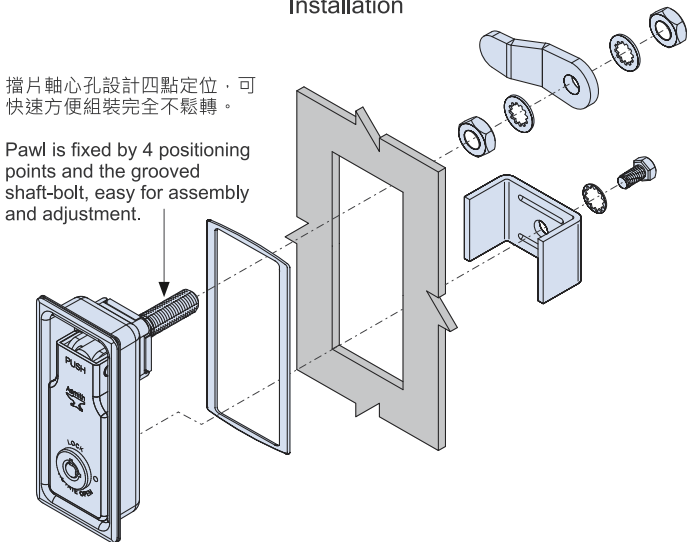


檔片型式 Pawl Type

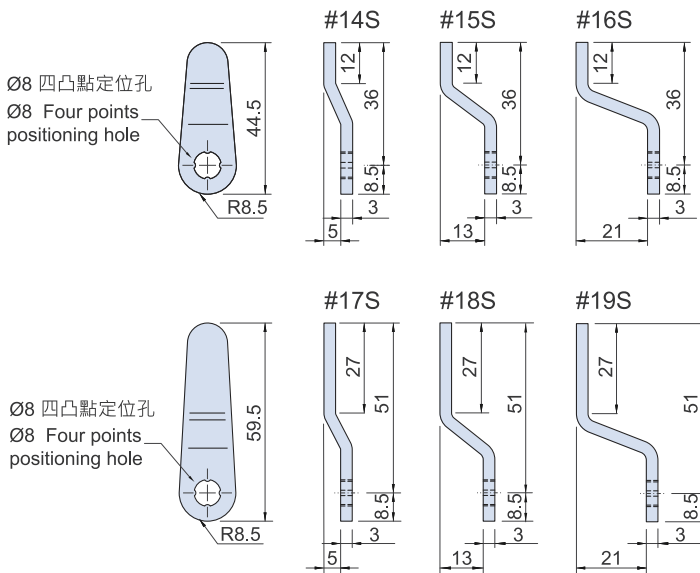

SPECIFICATION:

檔片型號 Pawl Type	材質 Material	表面處理 Finish	重量 Weight(g)
#44S	不銹鋼 SUS304	震動亮面 Vibration ground	10.8
#14S			13.6
#15S			14.6
#16S			17.2
#17S			18.7
#18S			18.7
#19S			18.7

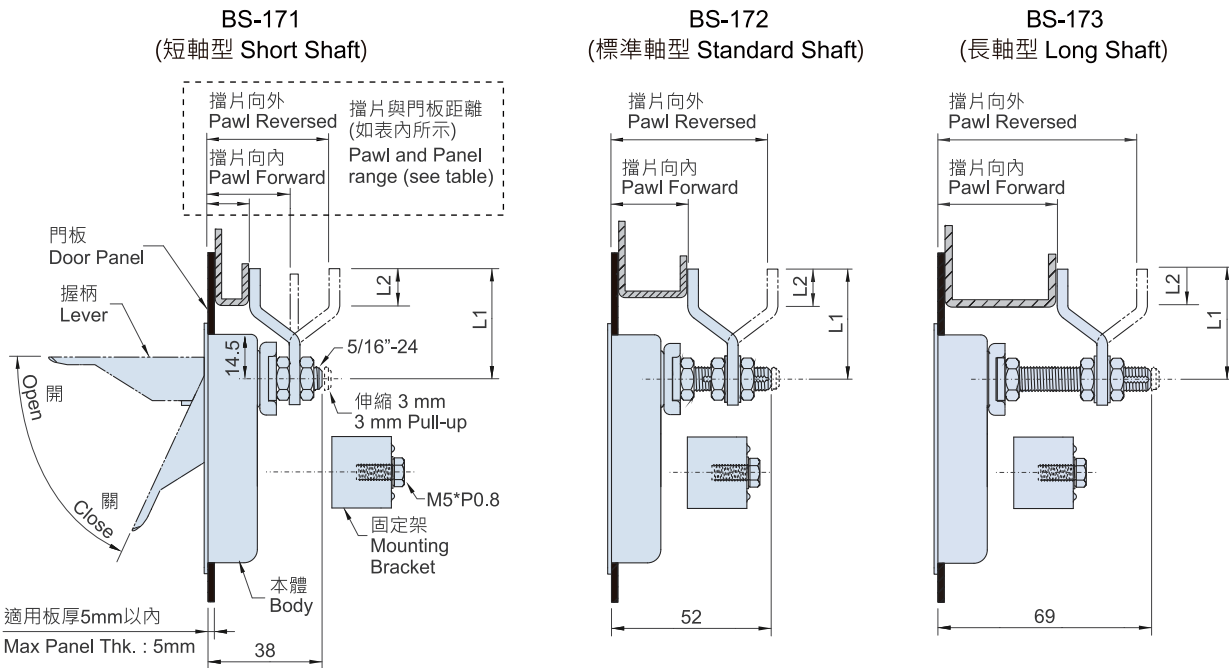

SPECIFICATION:

產品編號 Item No.		軸心型式 Shaft Type	檔片型式 Pawl Type	尺寸 Dimensions		檔片與門板距離 Pawl and Panel range		重量 Weight(g)	
無鎖芯 Without Lock	有鎖芯 With Lock		不鏽鋼 SUS304	L1	L2	向內 Pawl Forward	向外 Pawl Reversed	無鎖芯 Without Lock	有鎖芯 With Lock
BS-171744(W)	BS-1712-A44(W)	短軸型 Short Shaft	#44S	33		26		157.9	168.1
BS-171714(W)	BS-1712-A14(W)		#14S	36	12	21	31	160.7	170.9
BS-171715(W)	BS-1712-A15(W)		#15S			13	39	161.7	171.9
BS-171716(W)	BS-1712-A16(W)		#16S			5	47	164.3	174.5
BS-171717(W)	BS-1712-A17(W)		#17S	51	27	21	31	165.8	176
BS-171718(W)	BS-1712-A18(W)		#18S			13	39		
BS-171719(W)	BS-1712-A19(W)		#19S			5	47		
BS-172714(W)	BS-1722-A14(W)	標準軸型 Standard Shaft	#14S	36	12	27~37	37~47	171.9	182.1
BS-172715(W)	BS-1722-A15(W)		#15S			19~29	45~55	173.4	183.6
BS-172716(W)	BS-1722-A16(W)		#16S			11~21	53~63	175.7	185.8
BS-172717(W)	BS-1722-A17(W)		#17S	51	27	27~37	37~47	177.2	187.3
BS-172718(W)	BS-1722-A18(W)		#18S			19~29	45~55		
BS-172719(W)	BS-1722-A19(W)		#19S			11~21	53~63		
BS-173714(W)	BS-1732-A14(W)	長軸型 Long Shaft	#14S	36	12	44~54	54~64	176.9	187.1
BS-173715(W)	BS-1732-A15(W)		#15S			36~46	62~72	178.4	188.6
BS-173716(W)	BS-1732-A16(W)		#16S			28~38	70~80	180.7	190.9
BS-173717(W)	BS-1732-A17(W)		#17S	51	27	44~54	54~64	182.2	192.4
BS-173718(W)	BS-1732-A18(W)		#18S			36~46	62~72		
BS-173719(W)	BS-1732-A19(W)		#19S			28~38	70~80		