


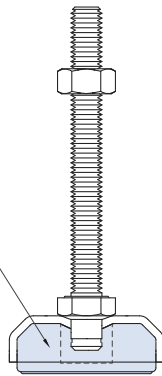
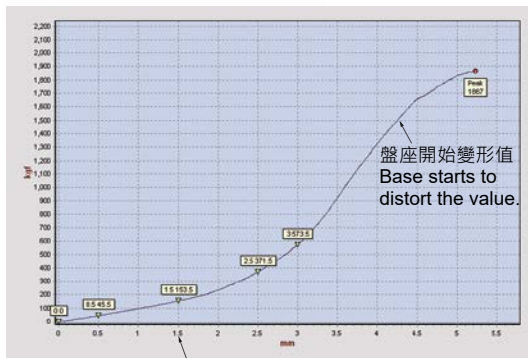


單支荷重 130~900Kgf
Load Capacity 130~900Kgf / each

整塊厚實橡膠盤墊
緊密貼合底座，
以加強防震效果。
The thick rubber
pad tightly adheres
to the chassis base
to enhance the
shock-absorbing
effect.

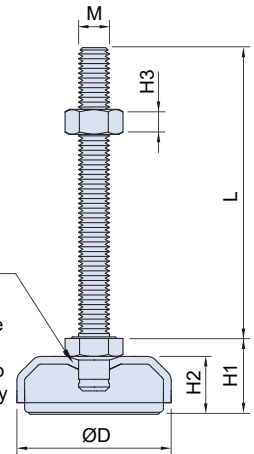


螺桿底部專利圓弧設計，
具有4度萬象調整，使設備
自動調整至完全水平。
The patented arc design
of the screw bottom, there are
4-degree swivel adjustment,
which make the machines to
automatically adjust to a fully
level position.



設定荷重 150 kgf 下壓值 1.5 mm，合金鋼 Ø40圓腳
座荷重測試曲線圖

Suppose the leveling feet was pressuring under
load capacity 150 kgf per 1.5 mm.
The chart shows the leveling feet load capacity of
SCM bolt and base dimension Ø40 mm.

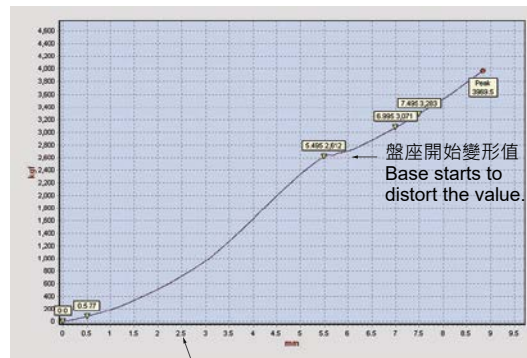

設定荷重 700 kgf 下壓值 2.5 mm，不鏽鋼304 Ø90 圓腳座荷重測試曲線圖

Suppose the leveling feet was pressuring under load capacity 700 kgf per 2.5 mm.
The chart shows the leveling feet load capacity of SUS304 bolt and base dimension Ø90 mm.

SPECIFICATIONS:

Unit:mm

產品編號 Item No.		尺寸 Dimensions								荷重 Load Capacity (kgf)	重量 Weight(g)	
SCM	SUS304	M	L	ØD	H1	H2	H3	W			SCM	SUS304
DK-0808035A	DS-0808035A	M8*P1.25	35	40	20	15	6.5	13	130		76	68
DK-0808050A	DS-0808050A		50								77	69
DK-0808075A	DS-0808075A		75								84	76
DK-0810050A	DS-0810050A	M10*P1.5	50	40	21	15	8	17	190		104	93
DK-0810075A	DS-0810075A		75								118	106
DK-0810100A	DS-0810100A		100								128	115
DK-0810050C	DS-0810050C		50	50	24	18			250		136	122
DK-0810075C	DS-0810075C		75								145	130
DK-0810100C	DS-0810100C		100								163	147
DK-0812035C		M12*P1.75	35	50	25	18			320		143	
DK-0812040C			40								146.8	
DK-0812075C	DS-0812075C		75								182	164
DK-0812100C	DS-0812100C		100	60	28	20			390		202	182
DK-0812150C	DS-0812150C		150								225	204
DK-0812075E	DS-0812075E		75	90	37.7	28			840		219	197
DK-0812100E	DS-0812100E		100								249	224
DK-0812150E	DS-0812150E		150								282	254
DK-0816075E		M16*P2.0	75	60	29	20			520		290	
DK-0816100E	DS-0816100E		100								318	311
DK-0816150E	DS-0816150E		150								387	436
DK-0816100H	DS-0816100H		100	75	32.7	23	13	24	780		440	430
DK-0816150H	DS-0816150H		150								506	509
DK-0816075L			75	90	37.7	28			840		544	
DK-0816100L	DS-0816100L		100								576	565
DK-0816150L	DS-0816150L		150								642	633
DK-0820100H	DS-0820100H	M20*P2.5	100	75	33	23			900		570	439
DK-0820150H	DS-0820150H		150								671	496
DK-0820200H			200								771	
DK-0820100L	DS-0820100L		100	90	37	27					706	519
DK-0820150L	DS-0820150L		150								806	593
DK-0820200L			200								906	

材質與表面處理

- 盤座&螺桿: DK-08 合金鋼(SCM)，鍍鋅。
DS-08 不銹鋼(SUS 304)，電解。
- 盤墊: 橡膠(NBR)，耐油、耐鹼、耐熱130°C。

特徵

- 螺桿與盤座結合處圓弧設計，提供4°萬向自動調整，解決角度公差，使機器及設備平穩度更佳。
- 防震、防銹(DS系列)、耐鹼、防滑、耐磨耗、耐油。
- 材料符合UL94 HB防火等級。

MATERIAL AND FINISH

- Base&Bolt: DK-08: Steel (SCM), Zinc plated.
DS-08: Stainless steel (SUS304), Electro Polishing.
- Cushion: Rubber (NBR), Resistance to Greasiness, Alkali / Heat 130°C.

FEATURES

- The curve of bolt's bottom and base's hole designs is for automatic leveling best.
- Resistance to conductance rust (DS Series), shock, slip, abrasion and greasiness.
- Use the original raw material compliant with UL94 HB standards.