



數位扭力扳手 *Digital Torque Wrench*

- LCD背光顯示
- 順時針及逆時針皆可操作
- 峰值保持(K) 與扭力追隨(F)模式 (可訂製特殊K模式) · WA series另含角度模式 (A)
- 四種扭力單位 · 可供選擇切換:N-m, kgf-cm, lbf-in, lbf-ft
WM-SD系列為三種扭力單位:cN-m, kgf-cm, in-lb
- 蜂鳴聲、LED燈警示(到達預設扭力值80%時)
- 震動警示(到達預設扭力值90%時)
- 省電模式: 2分鐘自動關機 (可訂製不關機模式)
- 記錄使用次數、歷史最大扭力
- 藍牙款:透過藍牙連線手機 · 隨時查詢歷史扭力紀錄(最多可瀏覽1000筆)
可透過Type-C將歷史扭力紀錄傳輸到電腦 · 以利品質控管
- LCD backlight display
- Both operator for cw, ccw
- Two modes : Peak hold (K) / Track (F), WA series also include an Angle (A)
- 4 units change: N-m, kgf-cm, lbf-in, lbf-ft (WM-SD series: cN-m, kgf-cm, in-lb)
- Warning function : Beep, LED indicator (When reach the torque setting value 80%)
- Vibration function : When reach the torque setting value 90%
- Automatically powers off when not in use for 2 minutes
(The non-shutdown mode can be customized)
- Recording usage frequency and the historical maximum torque
- Bluetooth Type: Access historical data at any time through Bluetooth connection to the mobile phone.(View up to 1000 records) connect via Type-C to save data on the computer



mobile wrench



BT-APP



影片-藍牙款
Video-BT



電腦軟體-藍牙款
Software-BT



影片-標準款
Video




WQ-BT
WI-BT



藍牙充電款：內建電芯保護特規電池，請勿自行更換市售充電電池
Bluetooth Type : Built-in battery with special specifications for cell protection,
please do not replace it with commercially available rechargeable batteries.

WQ
WA
WI



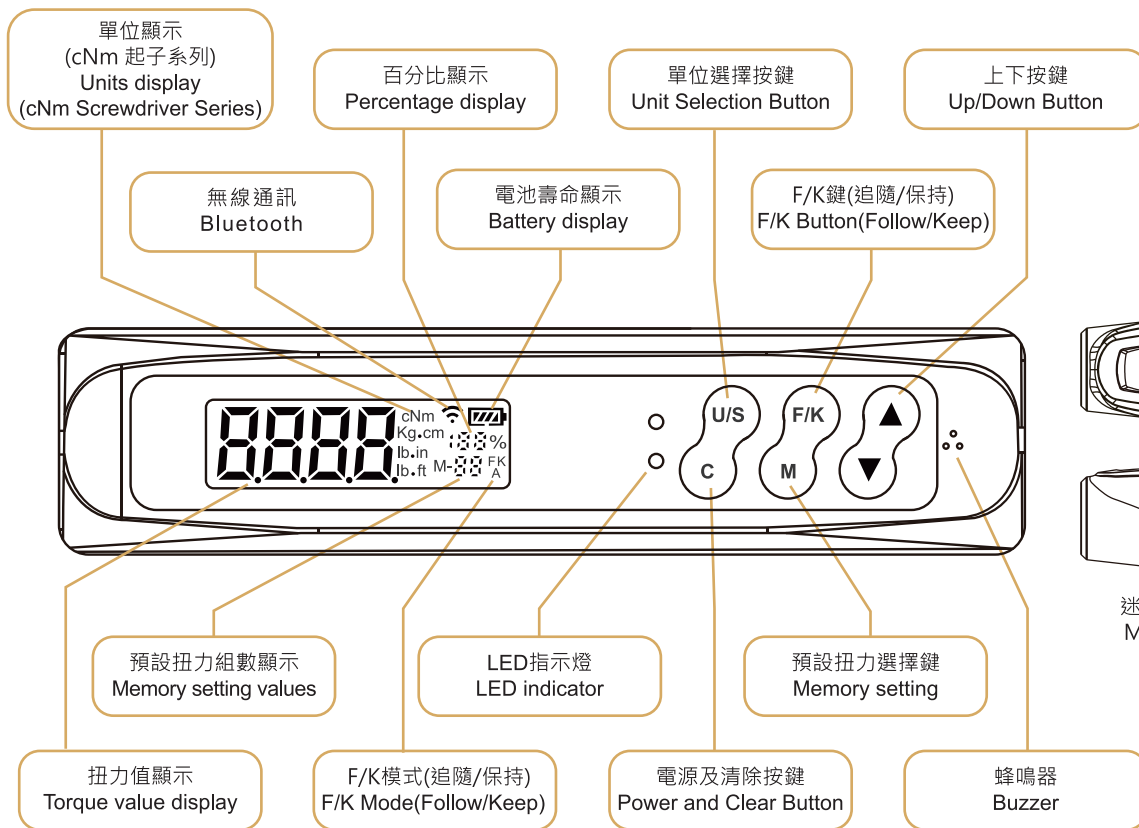

迷你型控制按鈕及顯示面板
Mini control buttons and display panel



WQ-200-3



- 配件：收納用鐵製工具箱x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書(中/英)x1, AA電池x2
 Content：Storage steel box x1, Certificate of calibration report x1, User guide(Bilingual) x1

SPECIFICATIONS:

※Unit Conversion : 1 Nm = 10.2 kgf-cm = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No. 電池款 Battery Type	精度 Accuracy	棘輪方頭 Drive	棘輪齒數 Ratchet Teeth	顯示及設定範圍 Setting Range	建議使用範圍 Suggested Range	解析度 Resolution	扳手長度 Length(mm)	扳手重量 Weight(±50g)	
WQ-30-1	CW:±1.5% CCW:±2.5%	1/4"	72	1.5~30 Nm	4.5~30 Nm	0.01 Nm	410	720	
WQ-30-2		3/8"		9~60 Nm				740	
WQ-60-2									
WQ-135-2		1/2"		6.8~135 Nm	20~135 Nm	0.1 Nm	434	890	
WQ-135-3				10~200 Nm	30~200 Nm		454	1080	
WQ-200-3							565	1300	
WQ-340-3				17~340 Nm	50~340 Nm		666	1420	
WQ-600-4		3/4"	24	30~600 Nm	90~600 Nm		940	3800	
WQ-800-4				40~800 Nm	120~800 Nm		1235	4800	
WQ-1000-4				50~1000 Nm	150~1000 Nm	1 Nm			

註：精度的扭力範圍在最大操作值的20%~100%

Notes: Accuracy guaranteed at 20% to 100% of full scale.