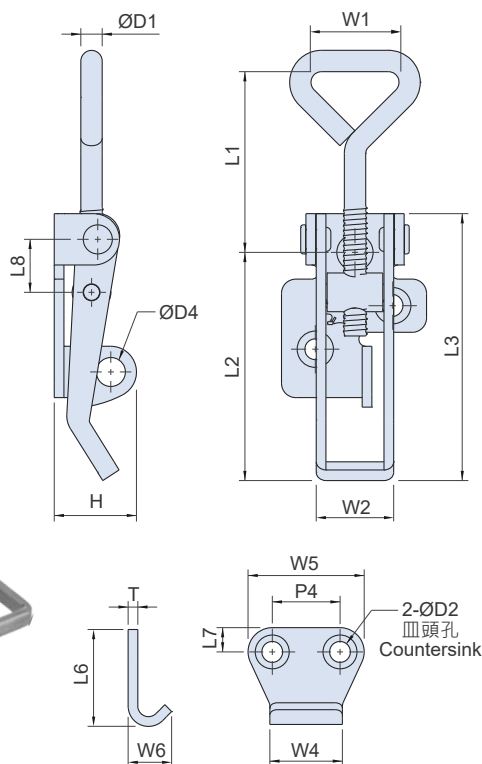
使用例
Example of application

材質與表面處理

- 鐵(SPPC) / 鐵(SPHC) · 鍍鋅。
- 不銹鋼(SUS304) · 震動亮面。

MATERIAL AND FINISH

- Cold-rolled steel(SPPC) / Hot-rolled steel(SPHC), Zinc plated.
- Stainless steel(SUS304), Vibration ground.

特徵

- 鉤環能依螺牙正反轉，調整適當鬆緊迫緊物件。
- 可用鋼掛鎖阻絕彈開可能性及增加安全性。
- 搭扣經過去毛邊處理，消除掀把銳利感，不須加工保護套。
- 搭扣含圖中之平面鉤，若須搭配垂直鉤，請參考下方之鉤仔。

FEATURES


- With adjustable latch rod, user can adjust the suitable compression force.
- Standard lock-hole available padlocks to prevent from the accident.
- Draw Latch was treated with a shaving edge to eliminate the sharpness, so there is no need to have protective cover in the produce process.
- The draw latch is including the horizontal keeper, if you need vertical keeper then you can reference the below information.

SPECIFICATIONS:


Unit:mm

產品編號 Item No.	材質 Material	尺寸 Dimensions																								引張荷重 Load capacity (kgf)	重量 Weight (g)
		L1	L2	L3	L4	L5	L6	L7	L8	W1	W2	W3	W4	W5	W6	H	P1	P2	P3	P4	D1	D2	D3	D4	T		
CS-0210	SUS304	34~42	47	55	38	8	20	5	11	18.2	16	30	15	24	10.6	17	20	16	11	14	4.4	4.3	4.3	4.8	2	70	51.2
CT-0210	SPCC																										
CS-0220	SUS304	48~65	53	67	50	14	22	6	12	21.4	20	32	17	30	13.3	19	27	18	11	17	5.3	5.3	5.3	5.8	2.5	85	96.2
CT-0220	SPCC																										
CS-0230	SUS304	50~70	85	98	61	12	29	7.5	15	34	30	40	22	45	17	24.5	36	22	19	22	7	5.3	5.3	6.8	3	95	209.8
CT-0230	SPCC																										
CS-0240	SUS304	57~75	90	102	61	12	30	9	16	34	32	42	22	40	17	26	36	22	19	22	7	6.5	6.5	8.3	4	145	250.8
CT-0240	SPHC																										


CS-0210-3

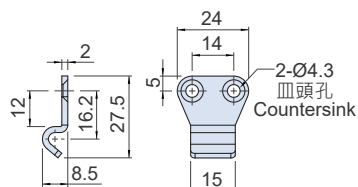

CS-0230-3

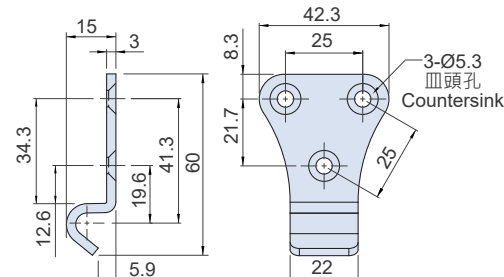

CS-0220-3

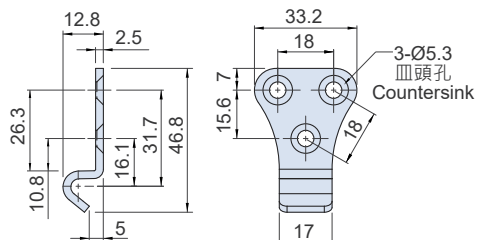

SPECIFICATION:

Unit:mm

產品編號 Item No.	樣式 Type	材質 Material	表面處理 Finish	適用 Apply to	重量 Weight(g)
CS-0210-3	垂直鉤	SUS304	震動亮面 Vibration ground	CS-0210 & CS-0212	8
CS-0220-3	Vertical keeper			CS-0220 & CS-0222	21.2
CS-0230-3				CS-0230 & CS-0232 CS-0240 & CS-0242	41.6